




A **HAVELLS** Brand

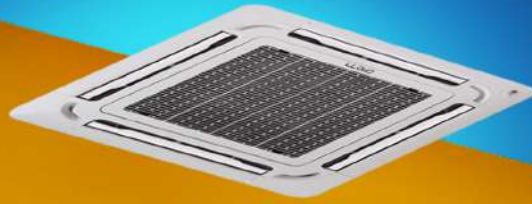


MAKE YOUR
COMMERCIAL SPACE
THE COOLEST PLACE
TO WORK OR CHILL!

LLOYD AIR CONDITIONING SOLUTIONS
FOR COMMERCIAL SPACES

TOWER AC



GLT24B1XWABP



Simple & Elegant Design

The modern and unique design of this Lloyd air conditioner delivers a premium and sleek look.



Touch Control

The control buttons are embedded into the body so that the unit can be controlled only with a gentle touch.



Smart 4-Way Swing

With the Smart 4-Way swing through horizontal and vertical louvers, the AC spreads cool air uniformly throughout the room, and makes room cool and comfortable.



Easy Clean Filter

The air inlet grill and filter are easy to remove, making the cleaning process much easier.



Low Noise

Optimised duct and turbine design makes the air conditioner much quieter during its operation.



Side Air Inlet

Uniquely designed side air inlet makes this unit much more appealing and easier to clean.

Technical Specification

Specification	Parameter	Unit	GLT24B1XWABP	GLT48C0XWAAG
	Description		2.0	4.0
	Star Rating		1	NA
	Compressor Type		Rotary	Scroll
	Refrigerant		R 32	R-410A
Electric Data				
	Power Supply	V-Hz-Ph	220 V ~ 240 V - 50 Hz - 1 Ph	380 V ~ 415 V - 50 Hz - 3 Ph
	Input Current (100%/50%)	A	8.1 A	9.02 A
Performance				
	Cooling Capacity (100%/50%)	W	6225 W	13500 W
	Input Power (100%/50%)	W	1850 W	5490 W
	ISEER		3.36	NA
	Air Flow**	m ³ /h	1210 m ³ /h	1680 m ³ /h
	Air Throw Distance	m	10 m	12 m
	Electricity Consumption	kWh	1432.1 kWh	4249.85 kWh
	IDU Noise*	dB	43 dB	52 dB
	ODU Noise*	dB	57 dB	64 dB
Weight & Measurement				
	IDU Dimensions (LxBxH)	cm	(51.0 x 31.5 x 175.0) cm	(55.0 X 35.0 X 180.0) cm
	IDU Packing (LxBxH)	cm	(64.5 x 35.5 x 186.0) cm	(68.5 X 46.5 X 191.0) cm
	IDU Net / Gross Weight	kg	35.9 kg / 41.9 kg	50.7 kg / 62.6 kg
	ODU Dimensions (LxBxH)	cm	(94.0 x 37.0 x 68.0) cm	(94.6 x 41.0 x 81.0) cm
	ODU Packing (LxBxH)	cm	(102 x 45.5 x 74.0) cm	(109.0 x 50.0 x 87.5) cm
	ODU Net / Gross Weight	kg	46.6 kg / 50.9 kg	81.2 kg / 86.0 kg



Auto Restart

On restoration of power after a sudden power failure, the AC will restart automatically and will operate based on the previous setting.



Golden Fin

The innovative anti-corrosion coating in the fin helps to prevent bacteria and enhances the efficiency of heat transfer.




Self-Diagnosis & Auto-Protection

In case of abnormal operation, the unit will protect the system by shutting down automatically. Meanwhile, the error code enables engineers to identify the problem quickly.



GLT48C0XWAAG

CASSETTE AC



Instant Cooling

Compared with the fixed-speed air conditioner, full DC inverter air conditioner increases its cooling speed by around 30%. It takes only 10 minutes to lower the room temperature 36 °C to 30 °C when the outdoor temperature is as high as 43°C.



Precision Temperature Control

Full DC inverter air conditioners outperform fixed-speed air conditioners in the aspect of precision temperature control.



Cool Surround 360 °C

The cassette's airflow design allows cool air to diffuse and sink evenly, offering uniform cooling experience throughout the space.



Fresh Air

Fresh air from outside can be led into the room through a connection pipe, which keeps the indoor air fresh and healthy.

Technical Specification

Category			Fixed Speed Cassette Models			
Specification	Parameter	Unit	GLC18B3XWAAG	GLC24B3XWAAG	GLC36B0XWAAG	GLC48B0XWAAG
	Description		1.5	2.0	3.0	4.0
	Star Rating		3	3	NA	NA
	Compressor Type		Rotary	Rotary	ROTARY	Rotary
	Refrigerant		R-32	R-32	R-32	R-32
Electric Data						
	Power Supply	V-Hz-Ph	230 V - 50 Hz - 1 Ph	230 V - 50 Hz - 1 Ph	380 V - 415 V - 50 Hz - 3 Ph	380 V - 415 V - 50 Hz - 3 Ph
	Input Current	A	6.5 A	8.1 A	5.21 A	8.8 A
Performance						
	Cooling Capacity	W	5100 W	6200 W	10551 W	13500 W
	Input Power	W	1325 W	1610 W	3600 W	4500 W
	ISEER		3.85	3.85	NA	NA
	Air Flow**	m ³ /h	1300 m ³ /h	1350 m ³ /h	1650 m ³ /h	1800 m ³ /h
	Electricity Consumption	kWh	1025.69 kWh	1246.31 kWh	2786.78 kWh	3483.48 kWh
	IDU Noise*	dB	43 dB	43 dB	45 dB	50 dB
	ODU Noise*	dB	57 dB	61 dB	63 dB	63 dB
Weight & Measurement						
	IDU Dimensions (LxBxH)	cm	(84.5 x 84.5 x 24.5) cm	(84.5 x 84.5 x 24.5) cm	(83.0 x 83.0 x 24.5) cm	(83.0 x 83.0 x 24.5) cm
	IDU Packing (LxBxH)	cm	(95.0 x 95.0 x 32.8) cm	(95.0 x 95.0 x 32.8) cm	(91.0 x 91.0 x 29.0) cm	(91.0 x 91.0 x 29.0)cm
	IDU Net / Gross Weight	kg	29 kg / 35 kg	30.5 kg / 36.5 kg	25.8 kg / 29.9 kg	28.0 kg / 32.1 kg
	ODU Dimensions (LxBxH)	cm	(81.0x 30.0 x 59.4) cm	(85.0 x 31.0 x 68.4) cm	(94.6 x 41.0 x 81.0) cm	(94.6 x 41.0 x 81.0) cm
	ODU Packing (LxBxH)	cm	(93.5 x 41.5 x 66.5) cm	(104.2 x 45.0 x 76.0) cm	(109.0 x 50.0 x 87.5) cm	(109.0 x 50.0 x 87.5) cm
	ODU Net / Gross Weight	kg	42 kg / 45.5 kg	48.5 kg / 53.0 kg	66.1 kg / 71.0 kg	71 kg / 76.1 kg

Technical Specification

Category			Inverter Cassette Models			
Specification	Parameter	Unit	GLC18I4FWAAG	GLC24I4FWAAG	GLC36I02AC	GLC48I02AC
	Description		1.5	2.0	3.0	4.0
	Star Rating		4	4	NA	NA
	Compressor Type		Rotary	Rotary	Rotary	Rotary
	Refrigerant		R-32	R-32	R-32	R-32
Electric Data						
	Power Supply	V-Hz-Ph	230 V - 50 Hz - 1 Ph	230 V - 50 Hz - 1 Ph	380 V - 415 V - 50 Hz - 3 Ph	380 V - 415 V - 50 Hz - 3 Ph
	Input Current (100%/50%)	A	7.2 / 4.5 A	8.2 / 5.0 A	6.43 A / 2.19 A	8.82 A / 2.79 A
Performance						
	Cooling Capacity (100%/50%)	W	5450 W / 2725 W	6200 W / 3100 W	10550 W / 5275 W	13000 W / 6500 W
	Input Power (100%/50%)	W	1540 W / 540 W	1745 W / 615W	3960 W / 1350 W	5430 W / 1720 W
	ISEER		4.6	4.6	NA	NA
	Air Flow**	m ³ /h	1250 m ³ /h	1300 m ³ /h	1800 m ³ /h	1800 m ³ /h
	Electricity Consumption	kWh	918.06 kWh	1043.12 kWh	2325.34 kWh	3066.53 kWh
	IDU Noise*	dB	41 dB	41 dB	46 dB	45 dB
	ODU Noise*	dB	57 dB	57 dB	59 dB	61 dB
Weight & Measurement						
	IDU Dimensions (LxBxH)	cm	(84.5 x 84.5 x 24.5) cm	(84.5 x 84.5 x 24.5) cm	(84.0 x 84.0 x 24.5) cm	(84.0 x 84.0 x 24.5) cm
	IDU Packing (LxBxH)	cm	(95.0 x 95.0 x 32.8) cm	(95.0 x 95.0 x 32.8) cm	(90.0 x 90.0 x 25.7) cm	(90.0 x 90.0 x 25.7) cm
	IDU Net / Gross Weight	kg	29 kg / 35 kg	30.5 kg / 36.5 kg	25.4 kg / 30.5 kg	27.7 kg / 32.7 kg
	ODU Dimensions (LxBxH)	cm	(78.1 x 28.1 x 55.5) cm	(78.1 x 28.1 x 55.5) cm	(94.6 x 41.0 x 81.0) cm	(94.6 x 41.0 x 81.0) cm
	ODU Packing (LxBxH)	cm	(92.5 x 39.5 x 60.5) cm	(92.5 x 39.5 x 60.5) cm	(109.0 x 50.0 x 87.5) cm	(109.0 x 50.0 x 87.5) cm
	ODU Net / Gross Weight	kg	28.5 kg / 30.5 kg	30 kg / 32 kg	66.9 kg / 71.5 kg	72.4 kg / 77.2 kg



HAVELLS INDIA LIMITED

QRG TOWERS, 2D, SECTOR 126, EXPRESSWAY, NOIDA - 201304, U.P. (INDIA)

Tel.: +91-120-3331000 | **Fax:** +91-120-3332000

For customer care services, please write to: perfectservice@havells.com

For corporate sales enquiry, write to: sales@havells.com

Customer Care No.: 0804-577-5666

VISIT US AT: WWW.MYLLOYD.COM

Copyrights subsists. Imitation of trade dress, graphics and color scheme of this document is a punishable offence. E&OE. Product feature and specification may vary $\pm 5\%$. Product Feature and specification may change from time to time for product improvement and development. Kindly refer to product manual for more information. Noise level reflects the level in Anechoic chamber. Images used are for reference only actual product may vary.



Air conditioners falls under e-waste category. Don't mix electronic waste with other waste, for proper disposal of e-waste kindly visit www.mylloyd.com/about-us/social-initiatives